

8961726 TEXAS INSTR (OPTO)

62C 36970 D


TIP640, TIP641, TIP642
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

REVISED OCTOBER 1984


- Designed For Complementary use with TIP645, TIP646, TIP647
- 175 W at 25°C Case Temperature
- 10 A Rated Collector Current
- Min h_{FE} of 1000 at 4 V, 5 A
- 100 mJ Reverse Energy Rating

T-33-29

device schematic



TO-3 PACKAGE

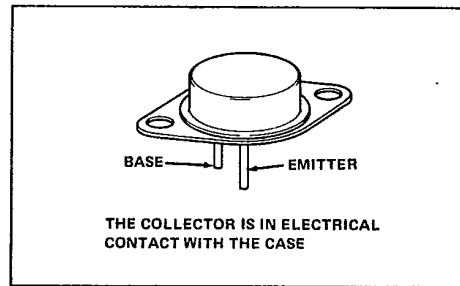

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

	TIP640	TIP641	TIP642
Collector-base voltage	60 V	80 V	100 V
Collector-emitter voltage ($I_B = 0$)	60 V	80 V	100 V
Emitter-base voltage	5 V		
Continuous collector current	10 A		
Peak collector current (see Note 1)	15 A		
Continuous base current	0.5 A		
Safe operating area at (or below) 25°C case temperature	See Figures 7 and 8		
Continuous device dissipation at (or below) 25°C case temperature (see Note 2)	175 W		
Continuous device dissipation at (or below) 25°C free-air temperature (see Note 3)	5 W		
Unclamped inductive load energy (see Note 4)	100 mJ		
Operating collector junction and storage temperature range	- 65°C to 200°C		
Lead temperature 3,2 mm (0,125 inch) from case for 10 seconds	260°C		

- NOTES:
1. This value applies for $t_{WV} \leq 0.3$ ms, duty cycle $\leq 10\%$.
 2. Derate linearly to 200°C case temperature at the rate of 1 W/°C or refer to Dissipation Derating Curve, Figure 9.
 3. Derate linearly to 200°C free-air temperature at the rate of 28.6 mW/°C or refer to Dissipation Derating Curve, Figure 10.
 4. This rating is based on the capability of the transistor to operate safely in the circuit in Figure 2. $L = 20$ mH, $R_{BB2} = 100 \Omega$, $V_{BB2} = 0$ V, $R_S = 0.1 \Omega$, $V_{CC} = 20$ V. Energy $\approx I_C^2 L / 2$.



TIP Devices

8961726 TEXAS INSTR (OPT0)

62C 36971 D

T-33-29

**TIP640, TIP641, TIP642
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS**

electrical characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS	TIP640			TIP641			TIP642			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V _{(BR)CEO}	I _C = 30 mA, See Note 5 I _B = 0,	60			80			100			V
I _{CEO}	V _{CE} = 30 V, I _B = 0			2							mA
	V _{CE} = 40 V, I _B = 0						2				
	V _{CE} = 50 V, I _B = 0								2		
I _{CBO}	V _{CB} = 60 V, I _E = 0			1							mA
	V _{CB} = 80 V, I _E = 0						1				
	V _{CB} = 100 V, I _E = 0								1		
I _{EBO}	V _{EB} = 5 V, I _C = 0			2			2			2	mA
h _{FE}	V _{CE} = 4 V, See Notes 5 and 6 I _C = 5 A,	1000			1000			1000			
	V _{CE} = 4 V, See Notes 5 and 6 I _C = 10 A,	500			500			500			
V _{BE}	V _{CE} = 4 V, See Notes 5 and 6 I _C = 10 A,			3			3			3	V
V _{CE(sat)}	I _B = 10 mA, See Notes 5 and 6 I _C = 5 A,			2			2			2	V
	I _B = 40 mA, See Notes 5 and 6 I _C = 10 A,			3			3			3	
V _F	I _F = 10 A, See Notes 5 and 6			3.5			3.5			3.5	V

- NOTES: 5. These parameters must be measured using pulse techniques, $t_w = 300 \mu s$, duty cycle $\leq 2\%$.
6. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts located within 3.2 mm (0.125 inch) from the device body.

resistive-load switching characteristic at 25°C case temperature

PARAMETER	TEST CONDITIONS†	MIN	TYP	MAX	UNIT
		t _{on}	I _C = 10 A, I _{B1} = 40 mA, I _{B2} = -40 mA, V _{BE(off)} = -4.2 V, R _L = 3 Ω, See Figure 1		
t _{off}			11		

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.



TIP Devices


8961726 TEXAS INSTR (OPTO)

62C 36972 D


TIP640, TIP641, TIP642
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

PARAMETER MEASUREMENT INFORMATION

T-33-29

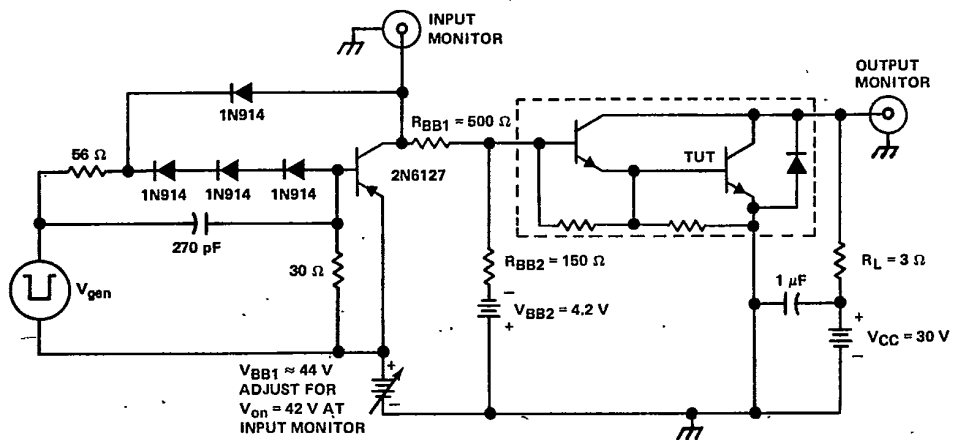

TEST CIRCUIT

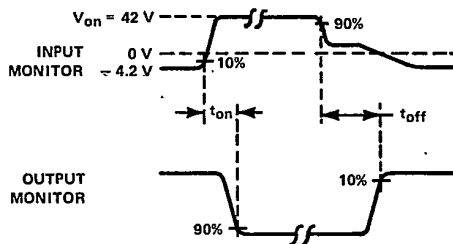

VOLTAGE WAVEFORMS

- NOTES: A. V_{gen} is a -30V pulse into a $50\ \Omega$ termination.
 B. The V_{gen} waveform is supplied by a generator with the following characteristics: $t_r \leq 15\text{ ns}$, $t_f \leq 15\text{ ns}$, $Z_{out} = 50\ \Omega$, $t_w = 20\ \mu\text{s}$, duty cycle $\leq 2\%$.
 C. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 15\text{ ns}$, $R_{in} \geq 10\text{ M}\Omega$, $C_{in} \leq 11.5\text{ pF}$.
 D. Resistors must be noninductive types.
 E. The d-c power supplies may require additional bypassing in order to minimize ringing.

FIGURE 1. RESISTIVE-LOAD SWITCHING



TIP Devices


8961726 TEXAS INSTR (OPTO)

62C 36973 D


TIP640, TIP641, TIP642
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

T-33-29

PARAMETER MEASUREMENT INFORMATION

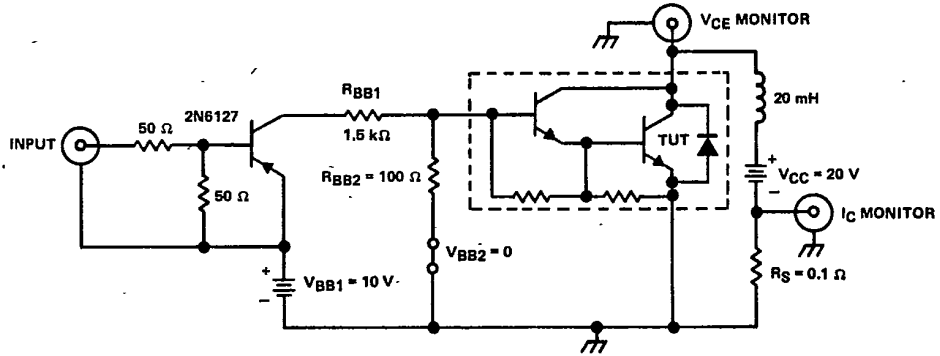

TEST CIRCUIT

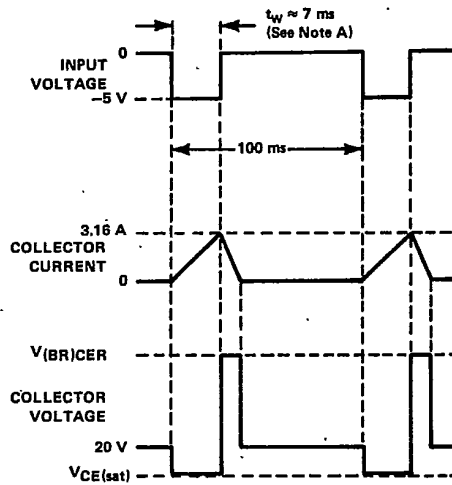

VOLTAGE AND CURRENT WAVEFORMS

NOTE A: Input pulse duration is increased until $I_{CM} = 3.16$ A.

FIGURE 2. INDUCTIVE-LOAD SWITCHING



TIP Devices

8961726 TEXAS INSTR (OPTO)

62C 36974 D

TIP640, TIP641, TIP642
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

TYPICAL CHARACTERISTICS

T-33-29

STATIC FORWARD CURRENT TRANSFER RATIO
vs
COLLECTOR CURRENT

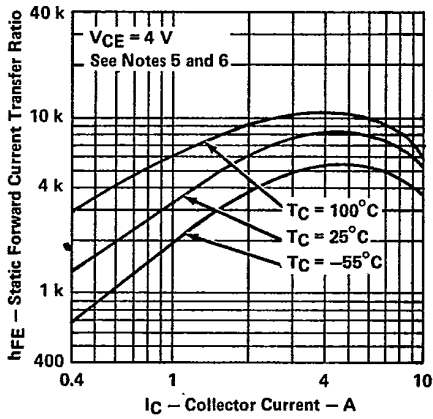


FIGURE 3

BASE EMITTER VOLTAGE
vs
CASE TEMPERATURE

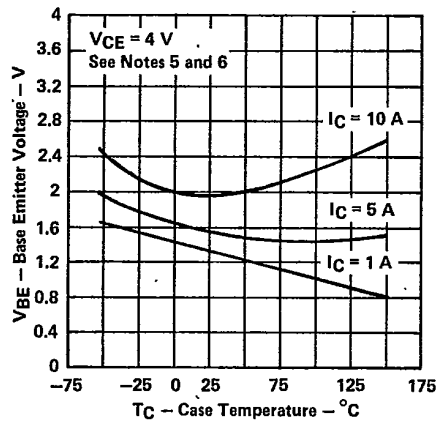


FIGURE 4

COLLECTOR-EMITTER SATURATION VOLTAGE
vs
CASE TEMPERATURE

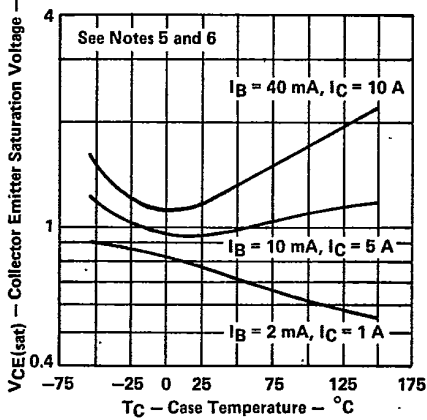


FIGURE 5

SMALL-SIGNAL COMMON-EMITTER
FORWARD CURRENT TRANSFER RATIO
vs
FREQUENCY

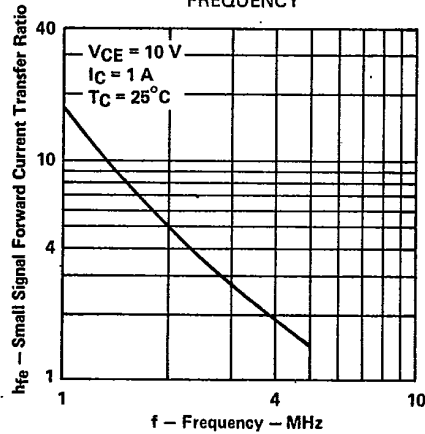


FIGURE 6

- NOTES: 5. These parameters must be measured using pulse techniques, $t_w = 300 \mu s$, duty cycle $< 2\%$.
6. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts located within 3.2 mm (0.125 inch) from the device body.



TIP Devices

8961726 TEXAS INSTR (OPTO)

62C 36975 D

T-33-29

**TIP640, TIP641, TIP642
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS**

MAXIMUM SAFE OPERATING AREA

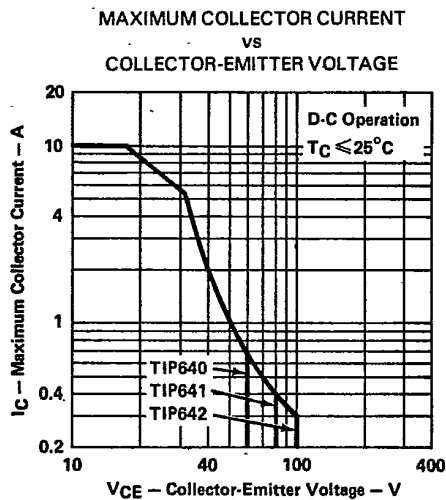


FIGURE 7

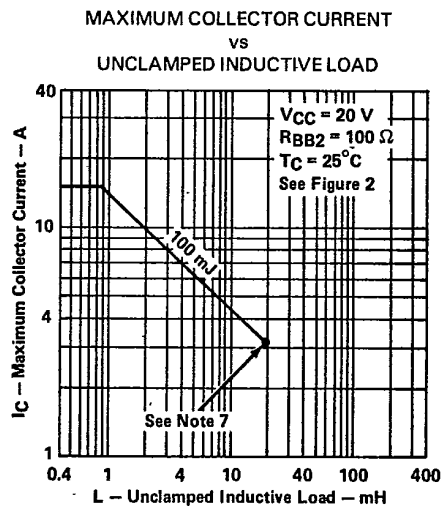


FIGURE 8

NOTE 7: Above this point the safe operating area has not been defined.

THERMAL INFORMATION

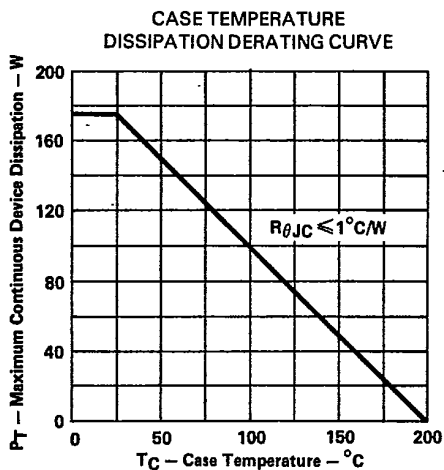


FIGURE 9

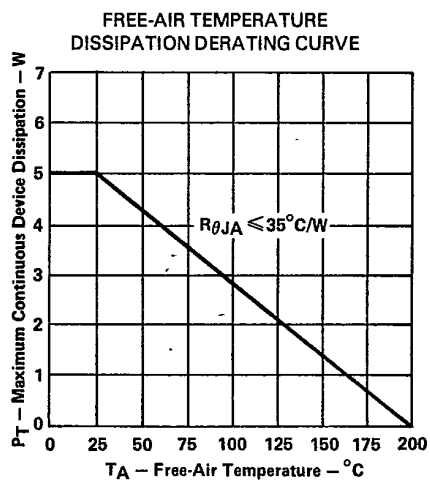


FIGURE 10



TIP Devices