

TC40H373P/F

C²MOS DIGITAL INTEGRATED CIRCUIT
SILICON MONOLITHIC

TC40H373 OCTAL D-TYPE LATCH (3-STATE OUTPUT)


The TC40H373 is an octal D-type latch having 3-stage output control terminal.

When OUTPUT-CONTROL input is at "L" level, if ENABLE is set to "H" level, data is outputted as it is, and if ENABLE input to "L" level, data immediately before ENABLE input goes from "H" level to "L" level is held.


Further, when OUTPUT-CONTROL input is set to "H" level, high impedance is given to output regardless of the other inputs.

Eight circuits are common to OUTPUT-CONTROL input and ENABLE input.

The function and pin assignment of this latch are the same as those of the 74LS373.

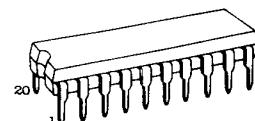

DIP20 (3D20A-P)



MFP20 (F20GA-P)

MAXIMUM RATINGS


CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{DD}	V _{SS} -0.5 ~ V _{SS} +10	V
Input Voltage	V _{IN}	V _{SS} -0.5 ~ V _{DD} +0.5	V
Output Voltage	V _{OUT}	V _{SS} -0.5 ~ V _{DD} +0.5	V
Input Current	I _{IN}	±10	mA
Power Dissipation	P _D	300(DIP)/180(MFP)	mW
Storage Temperature	T _{STG}	-65 ~ 150	°C
Lead Temp./Time	T _{SOL}	260°C • 10 sec	

TRUTH TABLE


INPUTS		OUTPUT	
OUTPUT CONTROL	ENABLE G	DATA	Q
L	H	H	H
L	H	L	L
L	L	*	Q ₀
H	*	*	High Impedance

* = Don't care

PIN CONNECTION

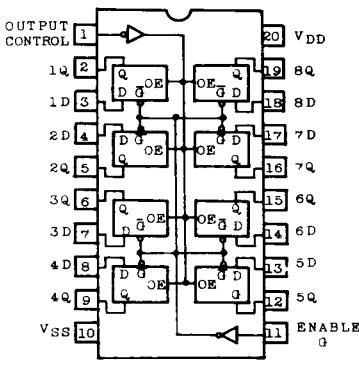

BLOCK DIAGRAM

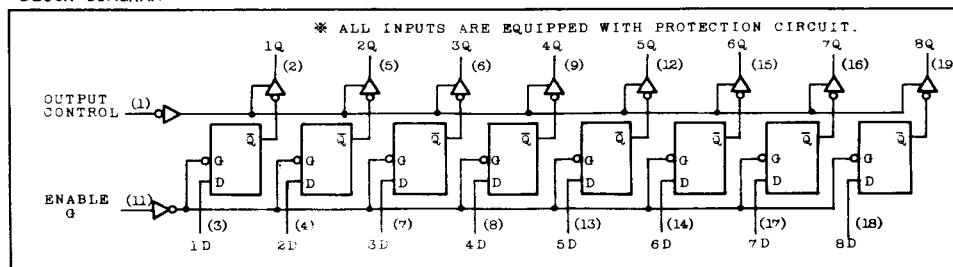

TC40H373P/F**RECOMMENDED OPERATING CONDITIONS (V_{SS}=0.0V)**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{DD}	-	2.0	-	8.0	V
Input Voltage	V _{IN}	-	0	-	V _{DD}	V
Operating Temperature	T _{opr}	-	-40	-	85	°C

ELECTRICAL CHARACTERISTIC (V_{SS}=0.0V)

CHARACTERISTIC	SYMBOL	TEST CONDITION	V _{DD} (V)	40°C		25°C			85°C		UNIT
				MIN.	MAX.	MIN.	TYP.	MAX.	MIN.	MAX.	
High Level Output Voltage	V _{OH}	I _{OUT} <1μA V _{IN} =V _{SS} , V _{DD}	5	4.95	-	4.95	5.0	-	4.95	-	V
Low Level Output Voltage	V _{OL}	I _{OUT} <1μA V _{IN} =V _{DD} , V _{SS}	5	-	0.05	-	0.0	0.05	-	0.05	
High Level Output Current	I _{OH}	V _{OH} =4.6V V _{IN} =V _{SS} , V _{DD}	5	-0.95	-	-0.88	-	-	-0.8	-	mA
Low Level Output Current	I _{OL}	V _{OL} =0.4V V _{IN} =V _{DD} , V _{SS}	5	4.7	-	4.4	-	-	4.0	-	
Input "H" Level	V _{IH}	I _{OUT} <1μA V _{OUT} =0.5V	5	4.0	-	4.0	-	-	-	-	V
Voltage "L" Level	V _{IL}	V _{OUT} =4.5V	5	-	1.0	-	-	1.0	-	1.0	
Input "H" Level	I _{IH}	V _{IH} =8.0V	8	-	0.3	-	10 ⁻⁵	0.3	-	1.0	μA
"L" Level	I _{IL}	V _{IL} =0.0V	8	-	-0.3	-	-10 ⁻⁵	-0.3	-	-1.0	
Output "H" Level	I _{DH}	V _{DH} =8.0V	8	-	0.5	-	10 ⁻⁴	0.5	-	5	μA
Output "L" Level	I _{DL}	V _{DL} =0.0V	8	-	-0.5	-	-10 ⁻⁴	-0.5	-	-5	
Quiescent Supply Current	I _{DD}	*V _{IN} =V _{SS} , V _{DD}	5	-	12.5	-	10 ⁻³	12.5	-	75	μA

* All valid input combinations.


SWITCHING CHARACTERISTIC(T_a=25°C, V_{SS}=0V, V_{DD}=5V, C_L=50pF, R_L=1kΩ)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Rise Time	t _{or}	Fig.1	-	15	30	ns
Output Fall Time	t _{of}		-	13	30	
Propagation Time	Low-High	t _{pLH}	DATA - Q Fig.1	-	38	57
	High-Low	t _{pHL}		-	32	48
Propagation Time	Low-High	t _{pLH}	ENABLE - Q Fig.1	-	39	59
	High-Low	t _{pHL}		-	35	53
Output Disable Time	High Level	t _{pHZ}	OUTPUT - Q Fig.2, 3	-	25	40
	Low Level	t _{pLZ}		-	27	40
Output Enable Time	High Level	t _{pZH}	CONTROL - Q Fig.1	-	27	40
	Low Level	t _{pZL}		-	30	45
Minimum Enable Pulse Width	t _w	Fig.1	-	9	20	ns
Minimum Set up Time	t _{set-up}	Fig.1	-	5	10	ns
Minimum Hold Time	t _{hold}		-	0	-	
Input Capacitance	C _{IN}		-	5	-	pF
Output Capacitance	C _{OUT}		-	12	-	


TC40H373P/F






SWITCHING TIME TEST CIRCUIT AND WAVEFORM

CIRCUIT 1

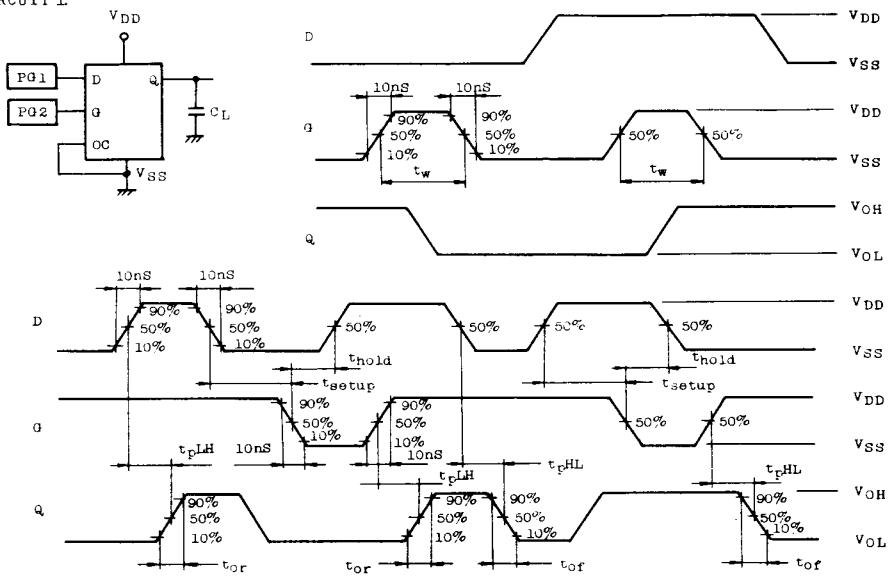

CIRCUIT 2

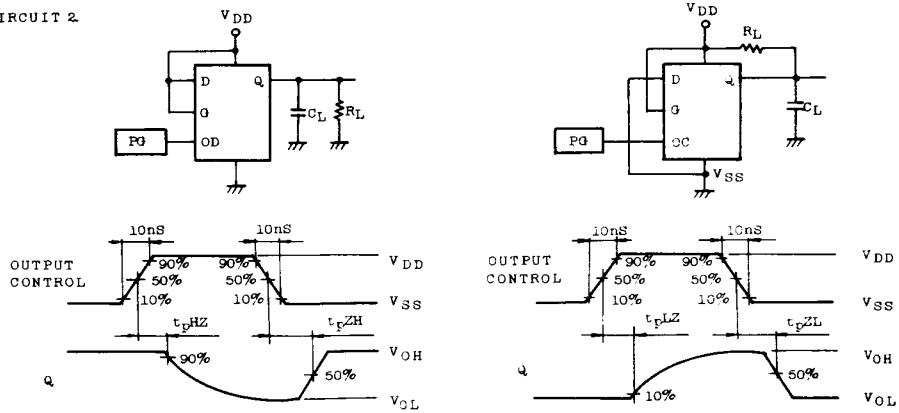

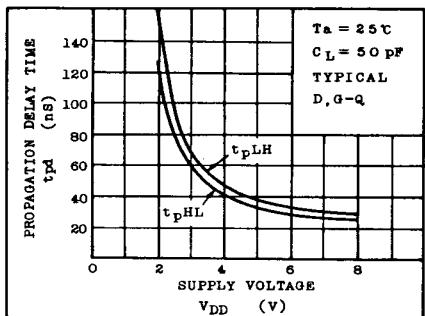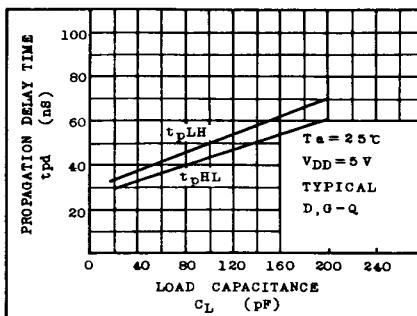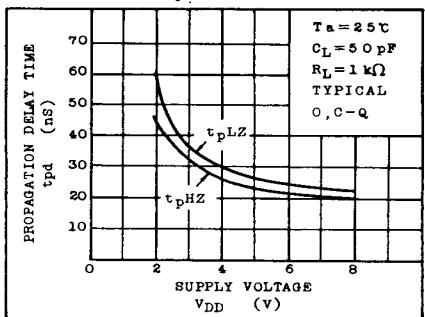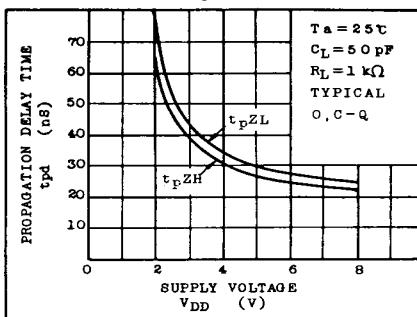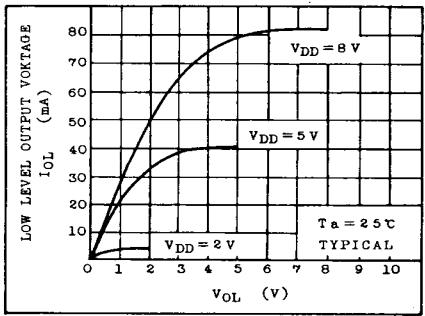TC40H373P/F $t_{pd} - V_{DD}$  $t_{pd} - C_L$  $t_{pd} - V_{DD}$  $t_{pd} - V_{DD}$  $I_{OL} - V_{OL}$  $I_{OH} - (V_{DD} - V_{OH})$ 